

Innovation | Technology | Precision



The name you can trust



Newtronic Lifecare Equipment Pvt. Ltd.
www.newtronic.in

Manufacturer of Humidity (Stability) Chambers | Walk-in Chambers | Deep Freezers | Ultra Low Deep Freezers | Cooling Chambers | Photostability Chambers | Incubators | Web based Software



Head Office - Mumbai



State of the Art plant - Umbergaon

Innovation | Technology | Precision

.... our key to excellence

For over 30 years now, NEWTRONIC LIFECARE has established itself as one of the leading brands in the space of Laboratory Equipments. Through a setup of task-specific departments, inter-department synergy & adherence to processes, we ensure a professionally managed environment for our employees & customers. We understand very clearly that the backbone of a successful customer relationship is an after-sales support that responds quickly & efficiently. We have therefore established service centers in all the major pharma hubs & states of India as well as in 40 countries internationally.

Welcome to the world of NEWTRONIC – the name you can trust

- ◆ Established in 1980
- ◆ Manufacturing facility of over 60,000 sq. ft.
- ◆ Export to 40 countries worldwide
- ◆ Online services support
- ◆ Globally available superior quality components
- ◆ PLC-based intelligent controlling systems
- ◆ Web-based software to access the chambers from anywhere, anytime
- ◆ Installation of more than 10,000 Chambers
- ◆ Large-sized chambers of upto 1 Million Litre capacity
- ◆ Execution of a single order of Walk-In Stability Chambers worth (₹) 100 Million (USD \$1.7 Million)

Features | Functions | Flexibility



Ethernet Communication:

- High-speed data transfer
- Significantly faster than serial(RS-485)communication
- Global standard for communication protocol
- No need for a separate PC interface
- Data Operations from any PC over the LAN



2nd Generation I-Series Controllers

- **No Data Loss:** Data Storage of 1000 readings on the PLC itself
- At an interval of 30 mins, data upto 20 days is stored on the PLC itself



Touch Screen Display

- All operations through a 4" Color touch screen display
- PLC IP Address setting
- Component Working Hours
- Standby system change over
- Password protection for set values and calibration mode
- User manual, Troubleshooting and Preventive Maintenance procedure
- Alarms recordings



Touch Screen Door Access System

- Both Password-based and Biometric based access control
- Restricts access to unauthorized persons



Humidity System

- Non-condensing Steam injection (Reach-Ins & small capacity Walk-Ins)
- Principles of Dew Point Control (Walk-Ins)



Standby Humidity & Cooling Systems

- Completely ready-to-use systems
- Automatic switch-over upon failure of primary systems
- Switch-over also upon detection of HP/LP & Internal faults
- Scheduled & manual change-overs
- **Booster Cooling for faster recovery**
- Recording of all change-overs in the software



Complete Range of Alarms

- Temperature & Humidity Deviations
- Door Opening
- Water Supply Failure
- Component Failure
- Mains Failure



Alarm Transmissions

- To Software
- To Remote Location (such as Security Gate)
- Through detailed SMS Notification
- Locally at equipment (audio-visual indication & on the display)



Mobile Alert System


- Time of Alarm transmission
- Name of Equipment
- Transmitted Message (Equipment Name, Alarm time, Type of Alarm & Limits)



Safety



- Temperature Overshoot/Undershoot
- Humidity Overshoot
- Low water-level
- Delay Timer to safeguard the Compressor
- ~~MCB to cut-off over-current supply~~
- Standby Controlling Sensor upon failure of Primary
- In Walk-in chambers door can be opened from inside
- Emergency Bell switch inside the Chamber



Multiple Sensors

- Either 4 or 8 probes can be placed
- Helps study the distribution of conditions in the different locations of the chamber
- Works as an auto-validation system
- Easy detection of drift in the sensors
- Helps determine the variations in conditions by change in sample-loading pattern



Documentation & Training

- DQ, IQ, OQ, PQ & SOP & Maintenance Manuals
- Calibration Certificates
- GA & Electrical Drawings
- Material Test Certificates
- Training to end-users



Audit Support

- Quick Resolution to NCs
- Justification to Excursions
- On-site support
- Remote support via Team Viewer
- Documentation

Temperature Range: 20°C to 60°C
Humidity Range: 40% Rh to 95% Rh

Humidity (Stability) Chambers

Standard Equipment

- Double walled with PUF insulation.
- SS 304 Interior & Exterior either SS 304 or Mild Steel
- Stainless Steel trays
- Full-length inner glass door & metal door with gasket & lock on the outside
- Internal LED lights
- Forced air circulation for uniform temperature
- PU wheels for easy movement
- U-shaped SS tubular heaters
- Non condensing steam injection type humidity system with standby heater & auto switch overs
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- Stand by humidity system with booster humidification
- Complete Operations driven through PLC with data logging capacity of upto 1000 readings & email facility
- High speed Ethernet based communication
- All operations through a single 4" Color Touch Screen
- High quality imported make T/Rh combo sensor with 4-20 mA output
- Safety devices: Low & high temperature cut-off settable thermostats & high humidity cut-off settable hygrometers
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ & SOP & Maintenance Manual

Power supply: 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

SPECIFICATIONS












- Temperature Range : 20°C to 60°C
- Temperature Accuracy : $\pm 0.2^\circ\text{C}$
- Temperature Uniformity : $\pm 1^\circ\text{C}$
- Humidity Range : 40% Rh to 95% Rh
- Humidity Accuracy : $\pm 2\%$ Rh
- Humidity Uniformity : $\pm 3\%$ Rh

Optional Accessories

- ICDAS - A Single Software installation for all Newtronic make equipments
- 4 pt. Temperature & Humidity Scanner
- Stand by Cooling System with auto switch over (430 litre & above)
- Door Access system (Numeric or Biometric)
- Mobile Alert system
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments

◆ Selection Guide

Exterior & Interior are of stainless steel (SS 304)	Capacity		Internal Size	External Size	Trays Qty.	Tray size	Approx. Weight kg	
	CuFt	Litre	(H*W*D)mm	(H*W*D)mm		mm	Equip.	Ship.
NLHC7SI	7	200	800 x 500 x 500	1350 x 630 x 945	3	430 x 460	150	225
NLHC11SI	11	300	1200 x 500 x 500	1795 x 630 x 945	4	430 x 460	200	275
NLHC16SI	16	430	1200 x 600 x 600	1795 x 730 x 1095	4	530 x 560	250	325
NLHC21SI	21	600	1200 x 700 x 700	1795 x 830 x 1195	4	630 x 660	275	350
NLHC28SI	28	800	1200 x 800 x 800	1795 x 930 x 1295	4	730 x 760	300	400
NLHC34SI	34	1,000	1500 x 800 x 800	2095 x 930 x 1295	5	730 x 760	325	425
NLHC54SI	54	1,500	1500 x 1600 x 600	2095 x 1760 x 1095	10	710 x 560	350	450
NLHC71SI	71	2,000	1500 x 1600 x 800	2095 x 1760 x 1295	10	710 x 760	375	475

Features	Ethernet	PLC Control	Touch Screen	Standby Cooling	Door Access	Alarms	Mobile Alert	E-mail Alert	Safety	Software	Documents
											

Temperature Range: 20°C to 60°C
Humidity Range: 40% Rh to 95% Rh

Walk-In Humidity (Stability) Chambers

ecotronicSystem
Green Mode Energy Optimisation



Standard Equipment

- **Chamber Operations based on Ecotronic system incorporating the principles of Dew point control as per the Psychrometric Chart**
- Double walled with 80mm PUF insulated modular panels with easy on-site assembly
- SS 304 Interior & Exterior either SS 304 or Pre Coated G. I.
- Stainless Steel Trays
- Observation window - 300 x 300 mm
- PVC strip curtain for reducing temperature leakages
- Heater line along the door to avoid condensation
- U-shaped SS tubular heaters
- Forced air circulation for uniform temperature
- Humidity is primarily controlled through the principles of Dew point control (for capacities > 8KL)
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- System is made up of split type condenser unit in well-ventilated area to avoid throw of hot air in the room
- Stand by humidity system with booster humidification
- Complete Operations driven through PLC with data logging capacity of upto 1000 readings & email facility
- High speed Ethernet based communication
- All operations through a single 4" Color Touch Screen
- High quality imported make T/Rh combo sensor with 4-20 mA output
- Safety devices: Low & High temperature cut-off settable thermostats & high humidity cut-off settable hygostat
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ & SOP & Maintenance Manual

Power supply: 230/415 volts 50 Hz main supply. Also available with 60 Hz Cycle.

SPECIFICATIONS

- Temperature Range : 20°C to 60°C
- Temperature Accuracy : $\pm 0.5^\circ\text{C}$
- Temperature Uniformity : $\pm 1^\circ\text{C}$
- Humidity Range : 40% Rh to 95% Rh
- Humidity Accuracy : $\pm 2\% \text{ Rh}$
- Humidity Uniformity : $\pm 3\% \text{ Rh}$

Optional Accessories


- ICDAS - A Single Software installation for all Newtronic make equipments
- 8pt. Temperature & Humidity Scanner
- Stand by Cooling System with auto switch over
- Door Access system (Numeric or Biometric)
- Mobile Alert system
- Remote alarm system suitable for 4 nos. Newtronic make equipments

◆ Selection Guide

Exterior & Interior are of stainless steel (SS 304)	Capacity		Internal Size	External Size	Trays Qty.	Tray size
	CuFt	Litre	(H*W*D)mtr.	(H*W*D)mtr.		mm
NLWH204SI	204	5,712	2.00 x 1.36 x 2.10	2.16 x 1.52 x 2.26	24	870 x 300
NLWH244SI1	244	6,854	2.40 x 1.36 x 2.10	2.56 x 1.52 x 2.26	32	870 x 300
NLWH300SU	300	8,400	2.00 x 2.00 x 2.10	2.16 x 2.16 x 2.26	24	870 x 600
NLWH360SU	360	10,080	2.40 x 2.00 x 2.10	2.56 x 2.16 x 2.26	32	870 x 600
NLWH428SU	428	12,000	2.40 x 2.00 x 2.50	2.56 x 2.16 x 2.66	48	700 x 600
NLWH552SU	552	15,480	2.40 x 2.50 x 2.58	2.56 x 2.66 x 2.74	48	700 x 800
NLWH660SU	660	18,480	2.40 x 2.50 x 3.08	2.56 x 2.66 x 3.24	48	870 x 800
NLWH1071SU	1,071	30,000	2.40 x 2.50 x 5.00	2.56 x 2.66 x 5.16	80	870 x 800
NLWH1844SU	1,844	51,643	3.00 x 4.24 x 4.06	3.16 x 4.40 x 4.22	140	870 x 600
NLWH2866SU	2,866	80,253	3.00 x 4.82 x 5.55	3.16 x 4.98 x 5.71	180	870 x 800

*Custom Build Chambers also available | * Models with Exterior powder coated GI sheet & Interior stainless steel (304) will be available on request.
Standard Inner Heights: 2.0, 2.4, 3.0 Mt | Standard Inner Width: 1.36, 2.0, 2.5, 4.0 Mt | Standard Inner Depths: 2.0, 3.0, 4.0, 5.0 Mt

Features

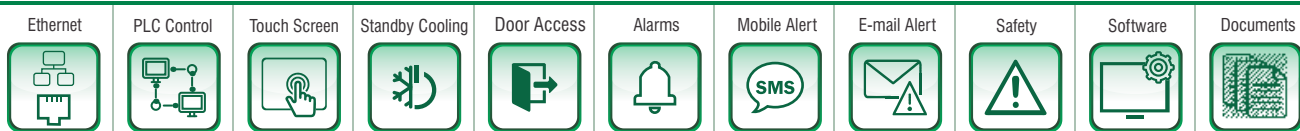

Temperature Range: 2°C to 8°C

Cooling Chambers (Laboratory Refrigerators)

Standard Equipment

- Double walled with PUF insulation
- SS 304 Interior & Exterior either SS 304 or Mild Steel
- Stainless Steel trays
- Metal door with gasket & lock on the outside
- Forced air circulation for uniform temperature
- PU wheels for easy movement
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- Complete operations driven through a single temperature controller with 2-line alpha-numerical LCD display & data logging capacity of upto 1000 readings
- High speed Ethernet based communication with Print facility
- High-quality PT-100 Temperature sensor
- Safety devices: Low temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ & SOP & Maintenance Manual

Power supply: 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.


Optional Accessories

- ICDAS - A Single Software installation for all Newtronic make equipments
- 4pt. Temperature Scanner
- Stand by Cooling System with auto switch over (430 litres & above)
- Door Access System (Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System
- **Grid-type partition for WS/RS sample arrangement**



SPECIFICATIONS

- Temperature Range : 2°C to 8°C
- Temperature Accuracy : $\pm 0.5^{\circ}\text{C}$
- Temperature Uniformity : $\pm 1^{\circ}\text{C}$

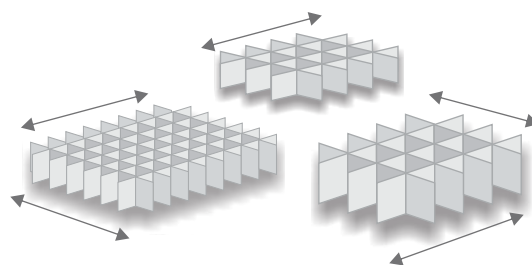

◆ Selection Guide

Exterior & Interior are of Stainless Steel (SS 304)	Capacity		Internal Size	External Size	Trays Qty.	Tray size	Approx. Weight kg	
	CuFt	Litre	(H*W*D)mm	(H*W*D)mm		mm	Equip.	Ship.
NLCC4SI	4	100	450 x 450 x 480	925 x 700 x 690	2	410 x 440	125	175
NLCC7SI	7	200	800 x 500 x 500	1350 x 630 x 905	3	430 x 460	150	225
NLCC11SI	11	300	1200 x 500 x 500	1795 x 630 x 905	4	430 x 460	200	275
NLCC16SI	16	430	1200 x 600 x 600	1795 x 730 x 1095	4	530 x 560	250	325
NLCC21SI	21	600	1200 x 700 x 700	1795 x 830 x 1195	4	630 x 660	275	350
NLCC28SI	28	800	1200 x 800 x 800	1795 x 930 x 1295	4	730 x 760	300	400
NLCC34SI	34	1,000	1500 x 800 x 800	2095 x 930 x 1295	5	730 x 760	325	425
NLCC54SI	54	1,500	1500 x 1600 x 600	2095 x 1760 x 1095	10	710 x 560	350	450
NLCC71SI	71	2,000	1500 x 1600 x 800	2095 x 1760 x 1295	10	710 x 760	375	475

Features



Temperature Range: 2°C to 8°C

Walk-In Cooling Chambers (Cold Rooms)



Also Available

Flameproof (Spark-free)

FIREsafe

Walk-In Cold room

Standard Equipment

- Double walled with 80mm PUF insulated modular panels with easy on-site assembly
- SS 304 Interior & Exterior either SS 304 or Pre Coated G. I.
- Stainless Steel Trays
- Observation window - 300 x 300 mm
- PVC strip curtain for reducing temperature leakages
- Heater line along the door to avoid condensation
- Forced air circulation for uniform temperature
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- System is made up of split type condenser unit in well-ventilated area to avoid throw of hot air in the room
- Complete Operations driven through PLC with data logging capacity of upto 1000 readings & email facility
- High speed Ethernet based communication
- All operations through a single 4" Color Touch Screen
- High-quality PT-100 Temperature sensor
- Safety devices: Low temperature cut-off settable thermostat
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ & SOP & Maintenance Manual

Power supply: 230/415 volts 50 Hz main supply. Also available with 60 Hz Cycle.

SPECIFICATIONS

- Temperature Range : 2°C to 8°C
- Temperature Accuracy : $\pm 0.5^{\circ}\text{C}$
- Temperature Uniformity : $\pm 1^{\circ}\text{C}$

Optional Accessories

- ICDAS - A Single Software installation for all Newtronic make equipments
- 8 pt. Temperature Scanner
- Stand by Cooling System with auto switch over
- Door Access system (Numeric or Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert system

◆ Selection Guide

Exterior & Interior are of Stainless Steel (SS 304)	Capacity		Internal Size	External Size	Trays Qty.	Tray size
	CuFt	Litre	(H*W*D)mtr.	(H*W*D)mtr.		mm
NLWC204SI	204	5,712	2.00 x 1.36 x 2.10	2.16 x 1.52 x 2.26	24	870 x 300
NLWC244SI	244	6,854	2.40 x 1.36 x 2.10	2.56 x 1.52 x 2.26	32	870 x 300
NLWC300SI	300	8,400	2.00 x 2.00 x 2.10	2.16 x 2.16 x 2.26	24	870 x 600
NLWC360SI	360	10,080	2.40 x 2.00 x 2.10	2.56 x 2.16 x 2.26	32	870 x 600
NLWC428SI2	428	12,000	2.40 x 2.00 x 2.50	2.56 x 2.16 x 2.66	48	700x 600
NLWC552SI	552	15,480	2.40 x 2.50 x 2.58	2.56 x 2.66 x 2.74	48	700 x 800
NLWC660SI1	660	18,480	2.40 x 2.50 x 3.08	2.56 x 2.66 x 3.24	48	870 x 800
NLWC1071SI	1,071	30,000	2.40 x 2.50 x 5.00	2.56 x 2.66 x 5.16	80	870 x 800
NLWC1844SI	1,844	51,643	3.00 x 4.24 x 4.06	3.16 x 4.40 x 4.22	140	870 x 600
NLWC2866SI	2,866	80,253	3.00 x 4.82 x 5.55	3.16 x 4.98 x 5.71	180	870 x 800

*Custom Build Chambers also available | * Models with Exterior pre-coated GI sheet & Interior stainless steel (304) will be available on request.
Standard Inner Heights: 2.0, 2.4, 3.0 Mt | Standard Inner Width: 1.36, 2.0, 2.5, 4.0 Mt | Standard Inner Depths: 2.0,3.0, 4.0, 5.0 Mt

Features



Temperature Range: (Ambient+5)°C to 60°C

Laboratory (Bacteriological) Incubators

Standard Equipment



- Double walled with PUF insulation
- SS 304 Interior & Exterior either SS 304 or Mild Steel
- Stainless Steel trays
- Full length inner glass door & outer metal door with gasket & lock on the outside
- LED light (200 litres & above)
- Forced air circulation for uniform temperature
- PU wheels for easy movement
- U shaped SS tubular heaters
- Complete operations driven through a single temperature controller with 2-line alpha-numerical LCD display & data logging capacity of upto 1000 readings
- High speed Ethernet based communication with Print facility
- High-quality PT-100 Temperature sensor
- Safety devices: High temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ, SOP & Maintenance Manual

Power supply: 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

Optional Accessories

- ICDAS - A Single Software installation for all Newtronic make equipments
- 4pt. Temperature Scanner
- Door Access System (Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System

SPECIFICATIONS

- Temperature Range : (Ambient+5)°C to 60°C
- Temperature Accuracy : $\pm 0.5^{\circ}\text{C}$
- Temperature Uniformity: $\pm 1^{\circ}\text{C}$

◆ Selection Guide

Interior & Exterior are of Stainless Steel (SS 304)	Capacity		Internal Size	External Size	Trays Qty.	Tray size	Approx. Weight kg	
	CuFt	Litre	(H*W*D)mm	(H*W*D)mm		mm	Equip.	Ship.
NLLI4SI	4	100	450 x 450 x 480	925 x 770 x 690	2	410 x 440	125	175
NLLI7SI	7	200	800 x 500 x 500	1350 x 630 x 905	3	430 x 460	150	225
NLLI11SI	11	300	1200 x 500 x 500	1795 x 630 x 905	4	430 x 460	200	275
NLLI16SI	16	430	1200 x 600 x 600	1795 x 730 x 1095	4	530 x 560	250	325
NLLI21SI	21	600	1200 x 700 x 700	1795 x 830 x 1195	4	630 x 660	275	350
NLLI28SI	28	800	1200 x 800 x 800	1795 x 930 x 1295	4	730 x 760	300	400
NLLI34SI	34	1000	1500 x 800 x 800	2095 x 930 x 1295	5	730 x 760	325	425
NLLI54SI	54	1500	1500 x 1600 x 600	2095 x 1760 x 1095	10	710 x 560	350	450
NLLI71SI	71	2000	1500 x 1600 x 800	2095 x 1760 x 1295	10	710 x 760	375	475

Features



Temperature Range: 5°C to 60°C

BOD Incubators (Cool Incubators)

Standard Equipment



- Double walled with PUF insulation
- SS 304 Interior & Exterior either SS 304 or Mild Steel
- Stainless Steel trays
- Full length inner glass door & outer metal door with gasket & lock on the outside
- LED light (200 litres & above)
- Forced air circulation for uniform temperature
- PU wheels for easy movement
- U shaped SS tubular heaters
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- Complete operations driven through a single temperature controller with 2-line alpha-numerical LCD display & data logging capacity of upto 1000 readings
- High speed Ethernet based communication with Print facility
- High-quality PT-100 Temperature sensor
- Safety devices: Low & high temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ, SOP & Maintenance Manual

Power supply: 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

Optional Accessories

- ICDAS - A Single Software installation for all Newtronic make equipments
- 4pt. Temperature Scanner
- Stand by Cooling System with auto switch over (430 litres & above)
- Door Access System (Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System

SPECIFICATIONS

- Temperature Range : 5°C to 60°C
- Temperature Accuracy : $\pm 0.5^{\circ}\text{C}$
- Temperature Uniformity : $\pm 1^{\circ}\text{C}$

◆ Selection Guide

Exterior & Interior are of Stainless Steel (SS 304)	Capacity		Internal Size	External Size	Trays Qty.	Tray size	Approx. Weight kg	
	CuFt	Litre	(H*W*D)mm	(H*W*D)mm		mm	Equip.	Ship.
NLBI4SI	4	100	450 x 450 x 480	925 x 770 x 690	2	410 x 440	125	175
NLBI7SI	7	200	800 x 500 x 500	1350 x 630 x 905	3	430 x 460	150	225
NLBI11SI	11	300	1200 x 500 x 500	1795 x 630 x 905	4	430 x 460	200	275
NLBI16SI	16	430	1200 x 600 x 600	1795 x 730 x 1095	4	530 x 560	250	325
NLBI21SI	21	600	1200 x 700 x 700	1795 x 830 x 1195	4	630 x 660	275	350
NLBI28SI	28	800	1200 x 800 x 800	1795 x 930 x 1295	4	730 x 760	300	400
NLBI34SI	34	1,000	1500 x 800 x 800	2095 x 930 x 1295	5	730 x 760	325	425
NLBI54SI	54	1,500	1500 x 1600 x 600	2095 x 1760 x 1095	10	710 x 560	350	450
NLBI71SI	71	2,000	1500 x 1600 x 800	2095 x 1760 x 1295	10	710 x 760	375	475

Features



Temperature Range: 10°C to 60°C

Walk-In Incubators



Standard Equipment

- Double walled with 80mm PUF insulated modular panels with easy on-site assembly
- SS 304 Interior & Exterior either SS 304 or Pre Coated G.I.
- Stainless Steel Trays
- Observation window - 300 x 300 mm
- PVC strip curtain for reducing temperature leakages
- Heater line along the door to avoid condensation
- U shaped SS tubular heaters
- Forced air circulation for uniform temperature
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- System is made up of split type condenser unit in well-ventilated area to avoid throw of hot air in the room
- Complete Operations driven through PLC with data logging capacity of upto 1000 readings & email facility
- High speed Ethernet based communication
- All operations through a single 4" Color Touch Screen
- High-quality PT-100 Temperature sensor
- Safety devices: Low & High temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ, SOP & Maintenance Manual

Power supply: 230/415 volts 50 Hz main supply. Also available with 60 Hz Cycle.

SPECIFICATIONS

- Temperature Range : 10°C to 60°C
- Temperature Accuracy : $\pm 0.5^\circ\text{C}$
- Temperature Uniformity : $\pm 1^\circ\text{C}$

Optional Accessories


- ICDAS - A Single Software installation for all Newtronic make equipments
- 8 pt. Temperature Scanner
- Stand by Cooling System with auto switch over
- Door Access system (Numeric or Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert system

◆ Selection Guide

Exterior & Interior are of Stainless Steel (SS 304)	Capacity		Internal Size	External Size	Trays Qty.	Tray size
	CuFt	Litre	(H*W*D)mtr.	(H*W*D)mtr.		mm
NLWI204SI	204	5,712	2.00 x 1.36 x 2.10	2.16 x 1.52 x 2.26	24	870 x 300
NLWI244SI	244	6,854	2.40 x 1.36 x 2.10	2.56 x 1.52 x 2.26	32	870 x 300
NLWI300SI	300	8,400	2.00 x 2.00 x 2.10	2.16 x 2.16 x 2.26	24	870 x 600
NLWI360SI1	360	10,080	2.40 x 2.00 x 2.10	2.56 x 2.16 x 2.26	48	870 x 600
NLWI428SI	428	12,000	2.40 x 2.00 x 2.50	2.56 x 2.16 x 2.66	48	700 x 600
NLWI552SI	552	15,480	2.40 x 2.50 x 2.58	2.56 x 2.66 x 3.74	48	700 x 800
NLWI660SI	660	18,480	2.40 x 2.50 x 3.08	2.56 x 2.66 x 3.24	48	870 x 800
NLWI1071SI	1,071	30,000	2.40 x 2.50 x 5.00	2.56 x 2.66 x 5.16	80	870 x 800
NLWI1844SI	1,844	51,643	3.00 x 4.24 x 4.06	3.16 x 4.40 x 4.22	140	870 x 600
NLWI2866SI	2,866	80,253	3.00 x 4.82 x 5.55	3.16 x 4.98 x 5.71	180	870 x 800

*Custom Build Chambers also available | * Models with Exterior pre-coated GI sheet & Interior stainless steel (304) will be available on request.
Standard Inner Heights: 2.0, 2.4, 3.0 Mt | Standard Inner Width: 1.36, 2.0, 2.5, 4.0 Mt | Standard Inner Depths: 2.0, 3.0, 4.0, 5.0 Mt

Features

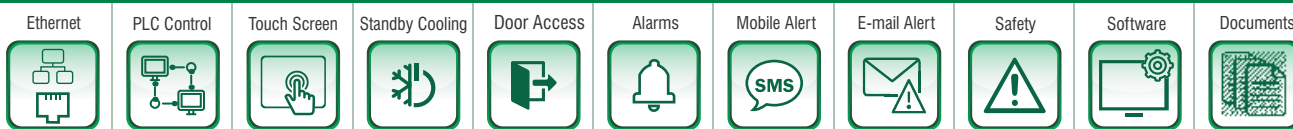

Standard Equipment





- Double walled with PUF insulation.
- SS 304 Interior & Exterior either SS 304 or Mild Steel
- Stainless Steel trays
- Metal door with gasket & lock on the outside.
- Forced air circulation for uniform temperature
- PU wheels for easy movement
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- Complete operations driven through a single temperature controller with 2-line alpha-numerical LCD display & data logging capacity of up to 1000 readings.
- High speed Ethernet based communication with Print facility
- High-quality PT-100 Temperature sensors
- Safety devices: Low temperature cut-off settable thermostat
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ & SOP & Maintenance Manual

Power supply: 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

Optional Accessories

- ICDAS – A Single Software installation for all Newtronic make equipments
- 4pt. Temperature Scanner
- Stand by Cooling System with auto switch over (430 litres & above)
- Door Access System (Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System
- **Grid-type partition for WS/RS sample arrangement**

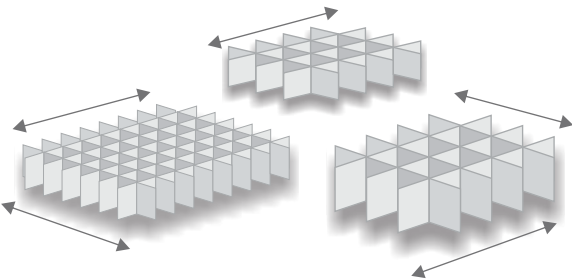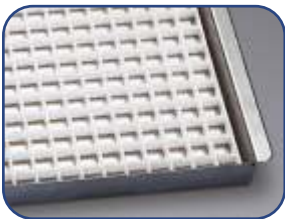

- SPECIFICATIONS**
- Temperature Range : -25°C to 0°C
 - Temperature Accuracy : ± 3°C
 - Temperature Uniformity : ± 5°C

Selection Guide

Exterior & Interior are of Stainless Steel (SS 304)	Capacity		Internal Size	External Size	Trays Qty.	Tray size	Approx. Weight kg	
	CuFt	Litre	(H*W*D)mm	(H*W*D)mm		mm	Equip.	Ship.
NLDF4SI	4	100	450 x 450 x 480	1050 x 715 x 715	2	410 x 440	125	175
NLDF7SI	7	200	950 x 500 x 450	1625 x 765 x 835	3	460 x 380	150	225
NLDF11SI	11	300	1200 x 500 x 500	1880 x 765 x 885	4	460 x 430	200	275
NLDF16SI	16	430	1200 x 750 x 500	1950 x 1015 x 1030	4	715 x 460	250	325
NLDF21SI	21	600	1200 x 750 x 700	1950 x 1015 x 1110	4	715 x 630	275	350
NLDF28SI	28	800	1200 x 800 x 840	1950 x 1065 x 1250	4	760 x 770	300	400
NLDF34SI	34	1,000	1460 x 800 x 850	2210 x 1065 x 1260	5	760 x 780	325	425




Temperature Range: -20°C to 50°C

Freeze Thaw Chambers

Storage conditions must be distributed in a manner that ensures that the product quality will not be adversely affected. With the exception of short transit times within the same climatic zone, it is virtually impossible to validate a shipping method against all environmental conditions.

Therefore, distribution stability studies are designed to generate additional data and to complement preformulation development and routine (ICH Q1A(R2)) studies

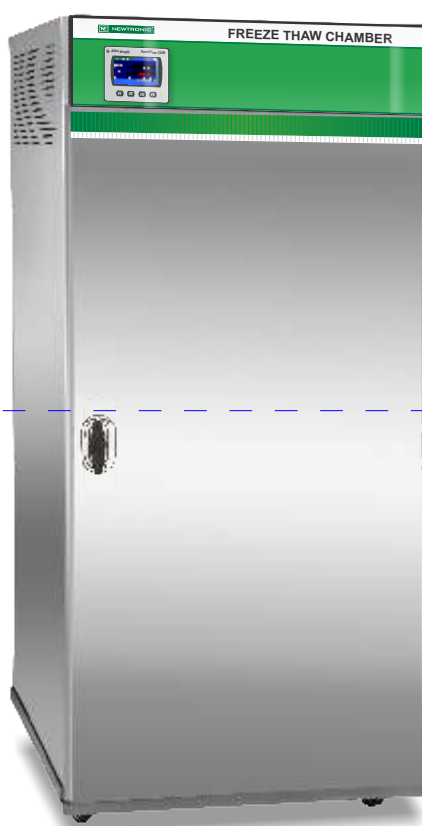

Standard Equipment

- Double walled with PUF insulation
- Interior & Exterior SS 304
- Stainless Steel trays
- Metal door with gasket & lock on the outside
- Forced air circulation for uniform temperature
- PU wheels for easy movement
- U shaped SS tubular heaters
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- Complete Operations driven through PLC with data logging capacity of upto 1000 readings & email facility
- High speed Ethernet based communication
- All operations through a single 4" Color Touch Screen
- High-quality PT-100 Temperature sensor
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ & SOP & Maintenance Manual

Power supply: 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

Mode of Operation

- User can program a specific profile needed for their application to enable rapid simulation conditions & the need to replicate freezing & thawing during product testing
- Upto 4 temperatures set point can be set in cyclic mode. eg. -20°C set for 48 hrs, 5°C for 24 hrs, 25°C for 72 hrs and 40°C for 120 hrs. No of such temperature cycles can be repeated

Optional Accessories

- ICDAS - A Single Software installation for all Newtronic make equipments
- Door Access system (Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert system

SPECIFICATIONS

- Temperature Range : -20°C to 50°C

◆ Selection Guide



Exterior & Interior are of Stainless Steel (SS 304)	Capacity		Internal Size	External Size	Trays Qty.	Tray size	Approx. Weight kg	
	CuFt	Litre	(H*W*D)mm	(H*W*D)mm		mm	Equip.	Ship.
NLFT7SI	7	200	950 x 500 x 450	1625 x 765 x 835	3	460 x 380	150	225
NLFT11SI	11	300	1200 x 500 x 500	1880 x 765 x 885	4	460 x 430	200	275
NLFT16SI	16	430	1200 x 750 x 500	1950 x 1015 x 1030	4	715 x 460	250	325
NLFT21SI	21	600	1200 x 750 x 700	1950 x 1015 x 1110	4	715 x 630	275	350
NLFT28SI	28	800	1200 x 800 x 840	1950 x 1065 x 1250	4	760 x 770	300	400
NLFT34SI	34	1,000	1460 x 800 x 850	2210 x 1065 x 1260	5	760 x 780	325	425

Features



Temperature Range: 10°C to 40°C

Photo Stability Chambers

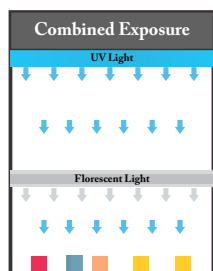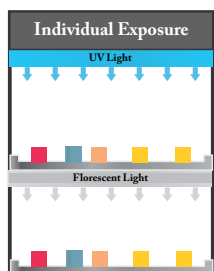

Small, Efficient, Sufficient



SPECIFICATIONS

- Temperature Range : 10°C to 40°C
- Temperature Accuracy : $\pm 0.5^\circ\text{C}$
- Temperature Uniformity : $\pm 1^\circ\text{C}$

◆ Selection Guide

Exterior & Interior are of Stainless Steel (SS 304)	Capacity		Internal Size	External Size	Trays Qty.	Tray size	Approx. Weight kg	
	CuFt	Litre	(H*W*D)mm.	(H*W*D)mm.		mm	Equip.	Ship.
NLPS4SI	4	100	450 x 450 x 480	925 x 700 x 690	1	410 x 440	125	200
NLPS8SI	8	227	600 x 630 x 600	1410 x 790 x 1005	1	580 x 560	175	250
*NLPSH8SI	8	227	600 x 630 x 600	1410 x 790 x 1405	1	580 x 560	175	250

Standard Equipment

- Double walled with PUF insulation
- Interior & Exterior SS 304. **Interior is provided with mirror finish**
- Stainless Steel trays
- Full-length inner glass door, metal door with gasket & lock on the outside
- Forced air circulation for uniform temperature
- PU wheels for easy movement
- Fluorescent tube light fitted in the centre of the chamber to provide illumination & produce visible light measured in lux
- UV light of wavelength 365nm (measured in watt/sq. m.) fitted on top of the chamber
- U-shaped SS tubular heaters
- CFC free cooling system consisting of hermetically sealed compressor coupled with evaporation coil & condenser
- Complete Operations driven through PLC with data logging capacity of upto 1000 readings & email facility
- High speed Ethernet based communication
- All operations through a single 4" Color Touch Screen
- High-quality PT-100 Temperature sensor
- Safety devices: Low & high temperature cut-off settable thermostats.
- **Safety thermostat switches off the lights upon temperature overshoot.**
- **Automatic switch off of UV lights upon door opening**
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ & SOP & Maintenance Manual

Power supply: 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

***Also available: Photostability Chambers with Humidity control**

Optional Accessories

- ICDAS - A Single Software installation for all Newtronic make equipments
- LUX and UV meter
 - ✓ Hand held or
 - ✓ Real-time measurement by inbuilt sensor
- Door Access System (Numeric or Biometric)
- Remote alarm system suitable for upto 4 nos. Newtronic make equipments
- Mobile Alert System

Features



Temperature Range: 50°C to 280°C

Laboratory Ovens



SPECIFICATIONS

- Temperature Range : 50°C to 280°C

Standard Equipment

- Double walled with mineral wool insulation.
- Stainless Steel Interior & Exterior either SS or Powder Coated
- Mesh type Stainless Steel trays
- Full length inner glass door with gasket and lock on the outside
- Forced air circulation for uniform temperature
- Ring type SS tubular heater
- Micro processor based auto tune temperature controller with 2 line LED display
- High-quality PT-100 Temperature sensor

Safety devices:

- High temperature cut-off settable thermostats
- Audio/Visual alarms for deviations
- Complete with DQ, IQ, OQ, PQ ,SOP & Maintenance Manual

Power supply: 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

Optional Accessories

- ICDAS - A Single Software installation for all Newtronic make equipments
- DSU 52: Additional hardware for data storage, software connectivity & print facility

Temperature Range: 40°C to 200°C

Vacuum Ovens



SPECIFICATIONS

- Temperature Range : 40°C to 200°C

Standard Equipment

- Fitted with highly accurate controller that allows gentle drying of heat sensitive materials avoiding damage due to rapid temperature overshooting
- Considerable reduction in drying time | Dries faster than the conventional oven
- Separate vacuum release valve releasing vacuum by gentle turning of the knob
- Separate vacuum connection valve preventing oil spilling in the oven
- Vacuum pump connection provided at the back of the oven
- Calibrated vacuum gauge and temperature controller
- The interior and the exterior of the chamber is made of stainless steel (SS 304)
- The door is provided with silicon gasket & positive latch to maintain seal at all vacuum levels
- Door with glass window for viewing of the sample inside the chamber
- Heater mounted below the tray, ensures rapid & equal heating without any thermal loss
- Using plate heating to ensure rapid & equal heating
- Audio alarm for temperature deviations
- Complete with DQ, IQ, OQ, PQ ,SOP & Maintenance Manual

Power supply: 230 volts 50 Hz main supply. Also available with 60 Hz Cycle.

Optional Accessories



- ICDAS - A Single Software installation for all Newtronic make equipments
- DSU 52: Additional hardware for data storage, software connectivity & print facility

Features



Web-based Data Logging & Real-time Monitoring System

Paperless recorder

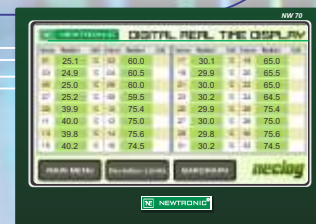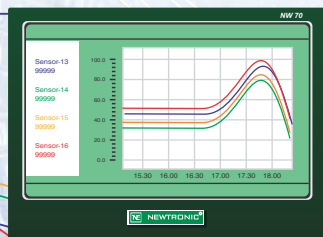

NECLOG provides variety of physical parameter to be logged, reported and alarm notification. Temperature, Humidity, Differential Pressure, CO₂ etc. parameters can be monitored and logged on long term basis.

Neclog is one of the unique solution with many advantages as easy-to-use, cost effective, high-accuracy solution for mapping critical and FDA-regulated environments from stability chambers to freezers and warehouses.

Faster Set-up | Lower Cost | Better Results

Fully compliant & easier to use

neclog >>




Alarms



Mobile



E-mail

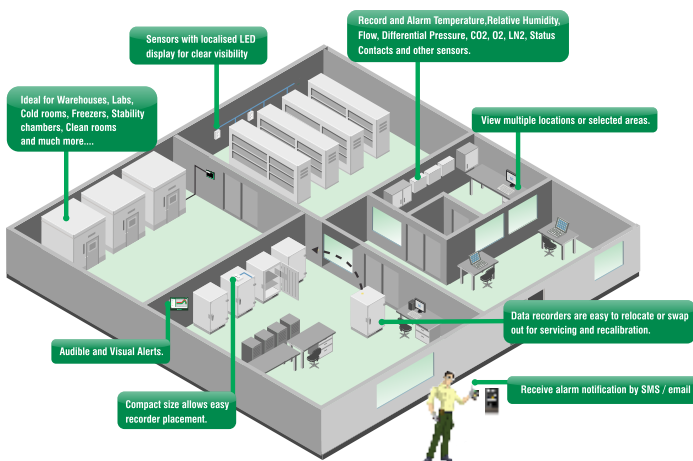

Precise monitoring with diverse application

- Large Memory
- Simple configuration with multiple sensors on serial link
- 24/7 alarms for immediate notification of out-of-specification
- Helps you to meet accreditations & all major regulatory requirements
- Web-based software 21 CFR Part 11 ready
- Versatile PC linkup via LAN, USB
- System-wide traceability & secured data transfer
- Multiple parameters

Specifications:

- Digital sensor
- Accuracy of humidity and temperature
- Dual temperature
- Differential pressure and temperature
- Pressure and temperature
- CO₂ and temperature



Mapping & Validation



Plug & Play features



Accurate temperature & humidity sensors



Versatile PC linkup via LAN & USB



Online and offline data interface




Browser based Software application

Web-based Software (ICDAS)

Access Anywhere Anytime

NEWTRONIC's ICDAS software changes the landscape of Stability Operations & Chamber Management. While it very effectively complies to the requirements of 21 CFR Part 11, it also meets the increasing demands for improved operational efficiencies. This server-based software gives the flexibility to operate the chambers remotely through any web browser and gives additional capabilities of going Paperless and system-based alert notifications of pending tasks.

Software Architecture

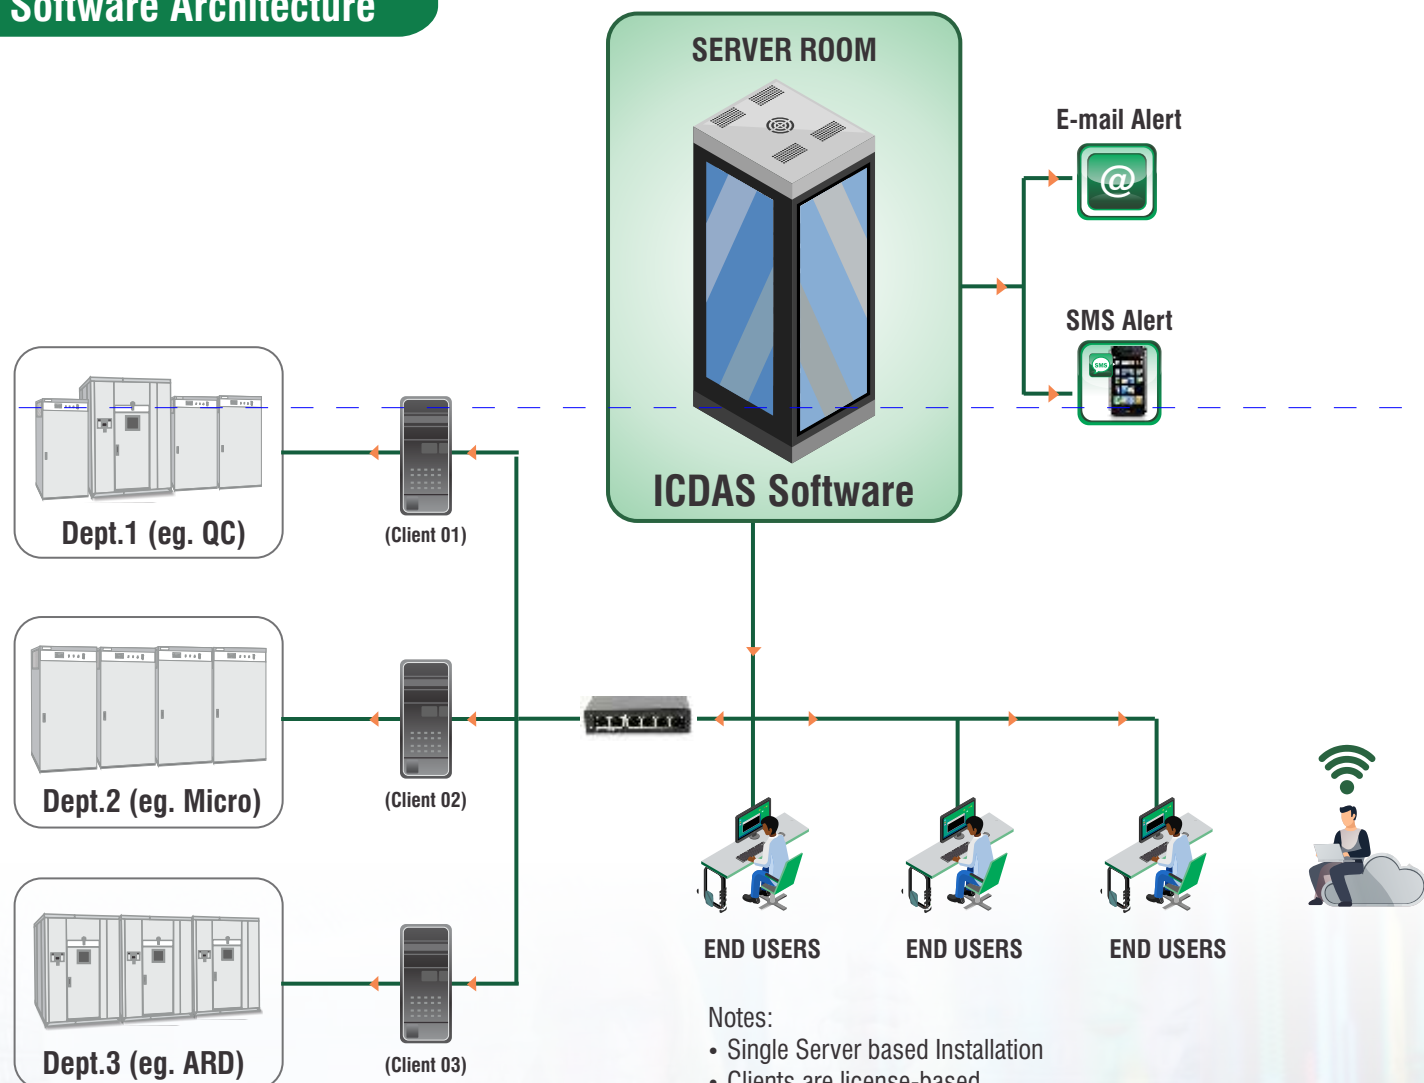

Notes:

- Single Server based Installation
- Clients are license-based
- 1 client per dept. for upto 15 equipments
- ICDAS lite version available (in lieu of server based)



Ever-ready for surprise audits



Go Paperless



Restricted Access Rights & Privileges



Seamless Configuration




Safe & Secure Data



Date & Timestamp Audit Trails

ALCOA+

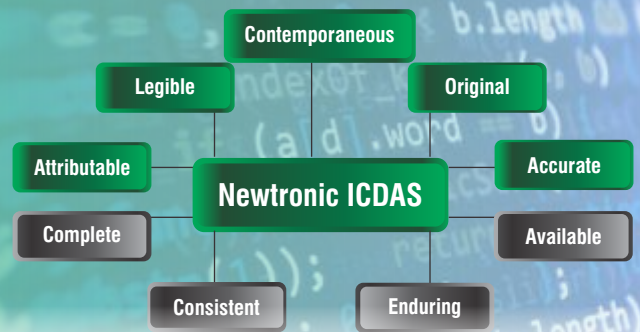

Instantly connect and control your chambers from anywhere without installing software.

Key Features



Installation

- Server-based; Web-based Software accessible through Browser
- **Installation that is one-time for Lifetime!** Eliminate the need for multiple software installation & qualifications!



Data Management

- **GO PAPERLESS!!** e-Review, e-Approval, e-Signature, e-Comments of:
Data Logs | Alarms | Audit Trails
- Multi-level data authorization (through e-review & e-approval)
- Comprehensive Audit Trails of Alarms, User activity, Equipment settings, email & SMS generation
- **Stay Audit-Ready every single day through Supervisory Email facility!**
- Run-time calculation of MKT
- Real-time display of all connected equipment in single screen



Configuration

- Configure multiple user-groups (Operator, Supervisor, Admin, etc)
- Department-wise segregation of users, equipment & data
- Plant-wide harmonization of reporting format (header, footer, etc.)
- Configure the type & no. of alarms to be sent via email/SMS & configure delay time too



Safe & Secure

- Automatic & Manual daily data backup facility. Automatic data backup can be done both, remotely & locally
- Additional features of Data Archival & Data Restore



Other Features

- Viewing I/O Status & Running Hours of all major components. Component running hours to determine the shelf-life of major components
- Centralized user-defined Alarms, Alerts & Notifications through SMS & emails
- System Diagnosis for troubleshooting via Team Viewer
- Software to keep you USFDA 21 CFR Part 11 Ready

Internationally proven innovative product range



NLEPL/CC/0919/2.0

Newtronic Service centers:

Domestic:

Ahmedabad	Hyderabad / Vizag
Baddi	Indore
Bangalore	Kolkata / Sikkim
Chennai	Mumbai
Delhi	Pune
Goa	

International:

Australia	Nepal	Uganda
Bangladesh	New Zealand	Ethiopia
China	Phillippines	Russia
Egypt	Singapore	UK
Indonesia	Thailand	USA
Vietnam	Turkey	
Malaysia	Algeria	
Mexico	Nigeria	

service@newtronic.in

service.exports@newtronic.in

* Newtronic reserve the right to change product specifications without prior notice



The name you can trust

NEWTRONIC LIFECARE EQUIPMENT PVT. LTD.

ISO 9001:2015 | ISO 13485:2016 | NABL ISO/IEC 17025:2005

Email:

India : sales@newtronic.in

International : exports@newtronic.in

Visit us on: www.newtronic.in

H.O.:

Kanakia Wall Street, A- Wing-612 Unit,
6th Floor, Chakala, Andheri Kurla Road,
Nr.Chakala Metro Station, Andheri (East),
Mumbai- 400093. India
T: +91 22 6853 4600

Plant:

Plot No-1205 & 1206, G.I.D.C. Ind. Estate,
Road No.: 13, At Umbergaon – 396171,
Dist.-Valsad (Gujarat)
T: 0260-2561411/22/33 /77