Aquinity² P10

Produces Ultra pure Water










The Aquinity² P10 system is designed for the production of ultra pure water (0.055 μ S/cm) out of tap water.

The Aquinity² P10 system is equipped with a reverse osmosis (RO) to produce deionised water into the integrated 10 liter storage tank with a production rate of 8 L/h. In the next step the ultra pure water is produced with a combination of optimized mixed bed cartridge and can be tapped with a flexible dispenser. If water is not used, automatic recirculation within the Aquinity² system ensures a permanent high quality of ultra pure water. All components of the Aquinity² are assembled in an especially designed housing. The system can be easily opened by removing the side panel to access the ultra pure module and UV lamp (185 nm/ 254 nm).

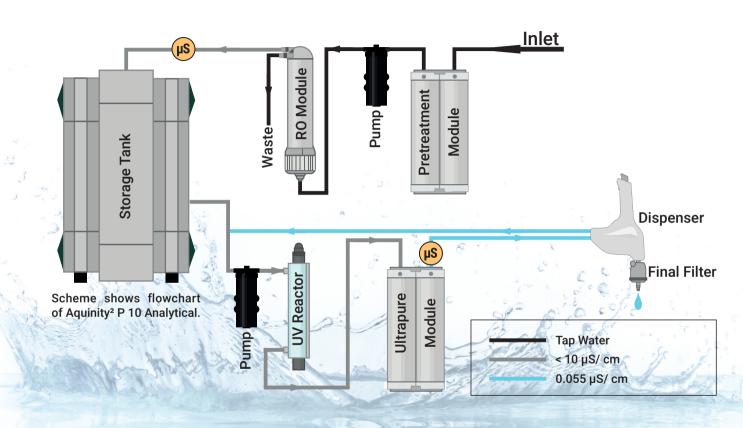

Technical Specifications



ultrapure water quality	0.055 μS/cm; Type I
resistivity	18.2 MΩ·cm
total organic carbon (TOC)	< 10 ppb Reagent < 3 ppb Analytical
dispensing flow rate	1.5 L/min
productivity rate	8 L/h*
bacteria	< 1 cfu/mL**
particulate	> 0.2 µm less than 1 particulate/mL
RNAse	< 1 pg/mL**
DNAse	< 5 pg/mL**
dimensions, weight, power	504 x 340 x 535 mm, 16-20 kg, 110-230 V

* not possible to tap pure water ** with microbiological final filter

Feed Water Requirements

type of feed water	tap water	4 .
feed water conductivity	< 1400 µS/cm	· · ·
inlet pressure	1.5 to 6 bar	Same of the same o
free chlorine	< 0.1 mg/L	
Silt Density Index (SDI)	< 3	
pH	3 to 9	A. Vice To
temperature	5 to 25 °C	

Configurations



Aquinity²P10 is available in two configurations (Reagent & Analytical) to fit the specific requirements of ultrapure water quality for different applications.

model	UV reactor	Cat. No.
Reagent	-	114-0070
Analytical	+	114-0071

Options

wall mounted configuration

To save valuable benchtop space the system can be ordered as wall mounted configuration. The whole system can me mounted on the wall with inclined display.

TOC monitoring (TI version)

The TOC monitoring during production and intermittent measurements during non-use periods allows to check the organic content in water continuously between 1 and 999 ppb.

volumetric dispensing

Our dispenser allows the volumetric controlled dispensing of water with an increment of 0.1 L and a tap volume from 0.1 to 99 L. The system prevents overflow of containers and allows to dispense water without supervising.



bench integrated (BI version)

To save valuable benchtop space the Aquinity² can be ordered as BI configuration. The system will be installed underneath the work bench and only the display and dispenser are mounted on the wall.




User Interface & Software

Currently recorded data and warning messages will be displayed on the touch screen monitor. The software furthermore supports the user with a self-diagnostic module which reduced

service time and costs.



Main Screen: The Software allows the user to see all information to use maintenance tool and track back historical values up to 1 year.



Helping tools to maintain system



Trackable values up to 1 year



Warning of customer in case of over limit and service case



Consumables

Description	Cat. No.
Ultrapure Module MemPak LS (Life Science)	190-0087
Ultrapure Module MemPak AL (Analytical)	190-0088
UV lamp (185 nm/ 254 nm)	921-0508
Pretreatment Module ProPak R10	290-0065
Final Filter, capsule 0.2 µm	190-0013*
Disinfection Tablets	290-0227

* 190-0082 Final Filter to reduce Endotoxin, DNA + RNAse



Made in Germany, more than 25 years...



membraPure GmbH

Wolfgang-Küntscher-Str. 14, 16761 Hennigsdorf/Berlin, Germany Tel.: +49 3302 - 201 20 0



info@membrapure.de www.membrapure.de